

## BACKPACK SPRAYER

Ideal for use in greenhouses, agriculture, landscaping, livestock farming, forestry and pest control.

- Ideal for use under the most demanding conditions thanks to the top quality materials and workmanship used to manufacture the sprayer.
- Multipurpose design makes this sprayer perfect for a variety of formula applications.
- Robust, high output pumping system requires less effort from the operator.
- High-quality materials that are corrosion resistant for long life.
- Large tank mouth with deep strainer that reduces the risk of spillage when filling.
- Tank lid with carrying handle and wand clips to make transportation and storage easy. One-way ventilation valve in tank lid prevents the operator from getting splashed by formula.
- Ergonomic pump handle folds upright for transportation and storage.
- Precision adjustable plastic spray nozzle provides spray patterns from fine mist to jet stream.
- Double-braided fiber-reinforced vinyl hose, is chemically resistant and flexible.
- Minimal maintenance required. Most service can be performed without tools.
- A wide assortment of accessories is available to enhance your spraying performance.
- Heavy-duty flow control with large filter for trouble-free spraying.
- Padded shoulder straps allow a fatigue-free spraying.
- Central attachment keeps the sprayer well-balanced.

Piston Diaphragm



USED MAINLY FOR:



Insecticides



Herbicides



Disinfectants




Medicinal baths  
for husbandry













Fertilizers

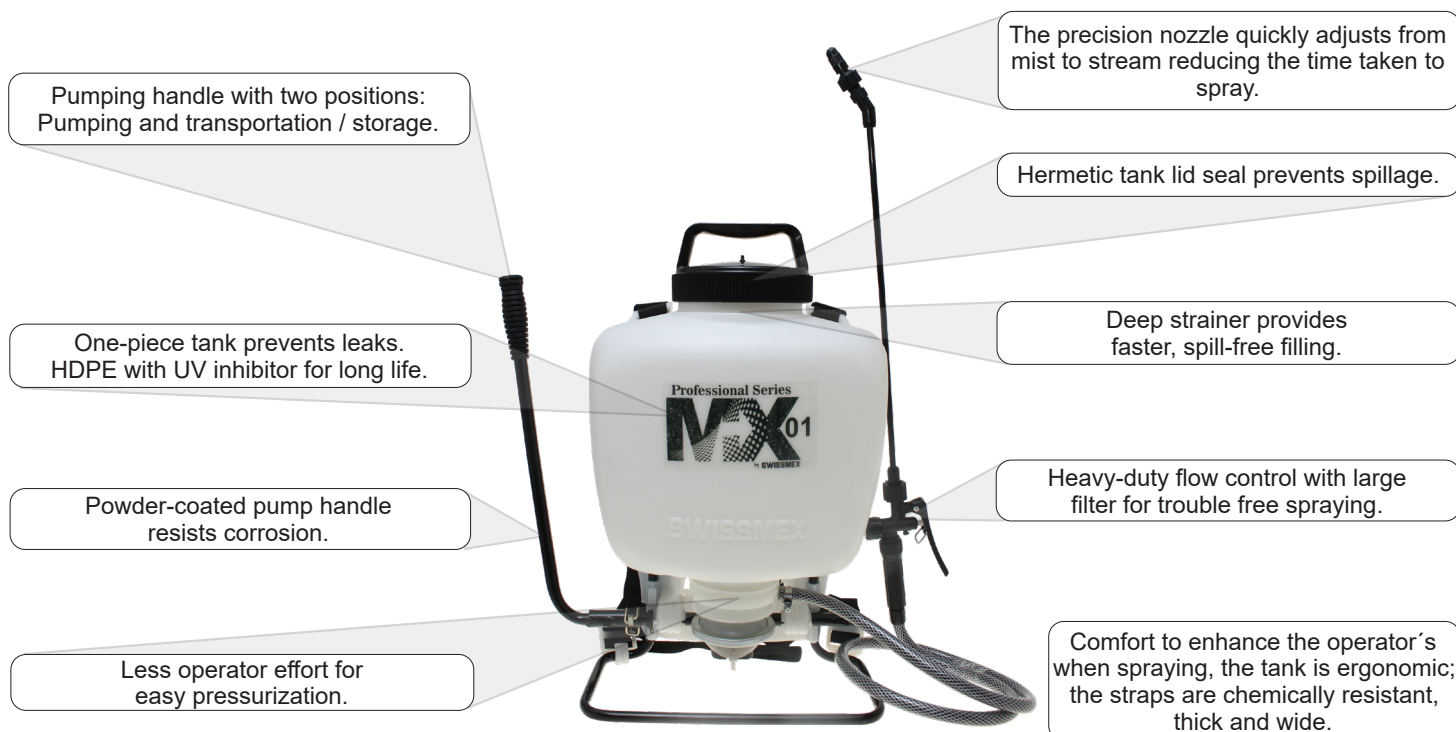

# TECHNICAL CHARACTERISTICS



## ACCESSORIES

<b>Brass spray lances (without spray tip, nut or gasket)</b>  E803-085 - 19.7"/50 cm E803-400 - 15.7"/40 cm		<b>FVR spray lances (without spray tip, nut or gasket)</b>  E219-195-C with two nozzles, length 19.7" / 50 cm	
<b>Brass extensions (with connector)</b>  E219-500-C - 26.4"/67 cm E219-510-C - 39.4"/1.0 m E219-520-C - 47.2"/1.20 m		<b>EXTENSION LANCE:</b> <b>2-nozzle brass extensions</b>  E219-098-C - 15.74" / 40 cm	
<b>2-nozzle FVR extensions</b>  E219-140-C - 19.6"/50 cm E219-147-C - 39.37"/20 cm E219-148-C - 28.7"/73 cm		<b>3-nozzle FVR extensions</b>  E219-138-C - 39.4"-de 1 m E219-151-C - 59.1 de 1.5 m	
<b>SCREEN SHIELDS</b>  E219-099 - 15.7" / 40 cm E219-117 - 8.7" / 22 cm		<b>COMPLETE NOZZLES</b>  E803-092-C  E219-610-C  E219-710-C	

## TECHNICAL DATA

SPECIFICATIONS	DESCRIPTION
Tank capacity	4 gal / 15 L
Carrying Straps	Cushioned with belt
Pumping system	Piston diaphragm
Hose	Fiber-vinyl – reinforced 3/8 inch (95.25mm)
Shut-off valve	Professional ergonomic with filter
Spray wand	Fiberglass 20.5 inch / 52 cm

SPECIFICATIONS	DESCRIPTION
Nozzle	Adjustable plastic
Output per minute at 45 psi(3 bar)	21.3 fl oz (630 ml)
Work pressure	1-6 bar (15-87 psi)
Net Weight	10.4 lbs / 4.7 kg
Weight with box	11.2 lbs / 5.1 kg
Dimensions	21.2 x 8.6 x 15.5" / 54x22x39.5 cm

Due to our commitment to technological progress, we reserve the right to make technical changes without prior notice.

Follow us:



Website: [www.swissmex.com](http://www.swissmex.com)

Email: [exports@swissmex.com.mx](mailto:exports@swissmex.com.mx)

Telephone: +52 (474) 74 122 16