

BACKPACK SPRAYER

PISTON

Ideal for use in greenhouses, agriculture, landscaping, livestock farming, forestry and pest control.



- Ideal for use under the most demanding conditions thanks to the top quality materials and workmanship used to manufacture the sprayer.
- Multipurpose design makes this sprayer perfect for a variety of formula applications.
- Robust, high output pumping system requires less effort from the operator.
- High-quality materials that are corrosion resistant for long life.
- Large tank mouth with deep strainer that reduces the risk of spillage when filling.
- Tank lid with carrying handle and wand clips to make transportation and storage easy. One-way ventilation valve in tank lid prevents the operator from getting splashed by formula.
- Mechanical agitation keeps the formula mixed during spraying. It can be removed when not needed.
- Ergonomic pump handle folds upright for transportation and storage.
- Precision adjustable brass spray nozzle provides spray patterns from fine mist to jet stream.
- Double-braided fiber-reinforced vinyl hose, is chemically resistant and flexible.
- Heavy-duty flow control with large filter for trouble-free spraying.
- Thick, wide, padded shoulder straps allow for fatigue-free spraying.
- Central attachment keeps the sprayer well-balanced.
- Minimal maintenance required. Most service can be performed without tools.
- A wide assortment of accessories is available to enhance your spraying performance.

kit that includes:

- Flat fan,
- Hollow cone
- Full cone



USED MAINLY FOR:



Insecticides



Herbicides



Disinfectants

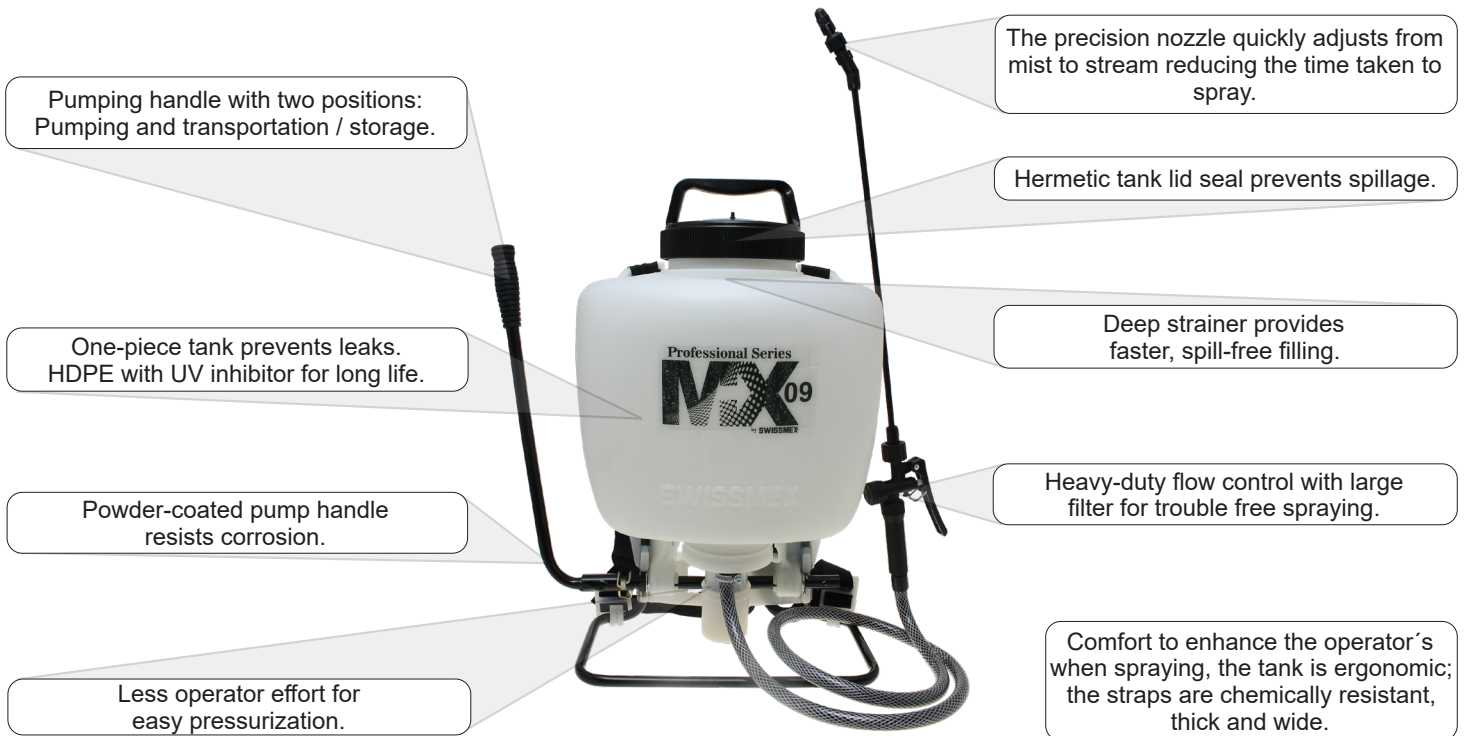


Medicinal baths
for husbandry















Fertilizers

TECHNICAL CHARACTERISTICS



ACCESSORIES

<p>Brass spray lances (without spray tip, nut or gasket)</p>  <p>E803-085 - 19.7"/50 cm E803-400 - 15.7"/40 cm</p>  <p>E219-195-C with two nozzles, length 19.7" / 50 cm</p>	<p>FVR spray lances (without spray tip, nut or gasket)</p>  <p>E219-136-C - 19.7"/50 cm E219-142-C - 39.4"/1.0 m E219-143-C - 59.1"/1.50 m E219-146-C - 78.7"/2.0 m</p>
<p>Brass extensions (with connector)</p>  <p>E219-500-C -26.4"/67 cm E219-510-C - 39.4"/1.0 m E219-520-C - 47.2"/1.20 m</p>	<p>EXTENSION LANCE: 2-nozzle brass extensions</p>  <p>E219-098-C - 15.74" / 40 cm</p>
<p>2-nozzle FVR extensions</p>  <p>E219-140-C - 19.6"/50 cm E219-147-C - 39.37"/20 cm E219-148-C - 28.7"/73 cm</p>	<p>3-nozzle FVR extensions 3-nozzle brass extensions</p>  <p>E219-138-C - 39.4"-de 1 m E219-151-C - 59.1 de 1.5 m</p>  <p>E219-420-C - 39.4-1.0 m</p>
<p>SCREEN SHIELDS</p>  <p>E219-099 -15.7" / 40 cm E219-117 - 8.7" / 22 cm</p>	<p>COMPLETE NOZZLES</p>  <p>E803-092-C</p>  <p>E219-610-C</p>  <p>E219-710-C</p>

TECHNICAL DATA

SPECIFICATIONS	DESCRIPTION	SPECIFICATIONS	DESCRIPTION
Tank capacity	4.0 US gal / 15.0 L	Spray wand	20.5 inch (52 cm) fiberglass
Filling port	5.6 inch (14.2 cm)	Nozzle	Plastic adjustable
Carrying Straps	Cushioned with belt	Output per minute at 45 psi(3 bar)	0.2 US gal / 800 ml
Pumping system	Piston	Work pressure	4 - 6 psi (1 - 6 bar)
Piston Sleeve	1.8 inch (45 mm)	Net Weight	9.5 lbs / 4.3 kg
Hose	fiber vinyl-reinforced 3/8 inch (95.25mm)	Weight with box	11 lbs / 5 kg
Shut-off valve	Professional ergonomic with filter	Dimentions	21 x 14 x 8 inch - 53 x 36 x 21 cm

Due to our commitment to technological progress, we reserve the right to make technical changes without prior notice.

Follow us:



Website: www.swissmex.com

Email: exports@swissmex.com.mx

Telephone: +52 (474) 74 122 16